


HDPE-Bottles (Hard Plastics) Washing Line

Reference line: Netherlands, approx. 2,5 t/h input capacity

Input: Contaminated HDPE-Bottles



HDPE-Bottles Wash Plant

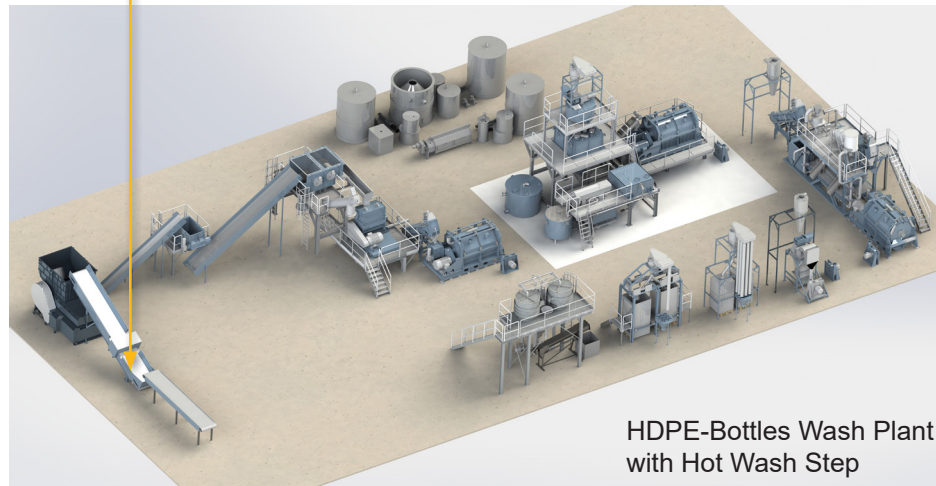

HDPE-Bottles Wash Plant with Hot Wash Step

Output material: Cleaned HDPE flakes



Technical data:

Input capacity:	approx. 1,5 – 4,0 t/h
Installed power:	approx. 400 – 700 kW (approx. 70% consumption) approx. 250 kW for Hot-Wash Step (approx. 70% consumption)
Dimensions:	up to approx. 50 x 30 x 9,5 m
Water amount:	approx. 25 - 50 m ³ /h water in circulation approx. 1,5 m ³ /t* ^h fresh water consumption

Item-No.: 0071037310



Engineering, Manufacturing, Delivery:

HERBOLD Meckesheim GmbH

Industriestrass 33 | D-74909 Meckesheim
Fon: +49 6226 932-0 | Fax: +49 6226 932 495
herbold@herbold.com | www.herbold.com