

PO-Film Washing Line

Reference line: Bulgaria, approx. 4,0 t/h input capacity

Input: Contaminated LDPE-film



Pre-Washing unit: Sink Fraction




Hydrocyclone: Heavy medium material



Output: Cold-Washed




Output: Hot-Washed

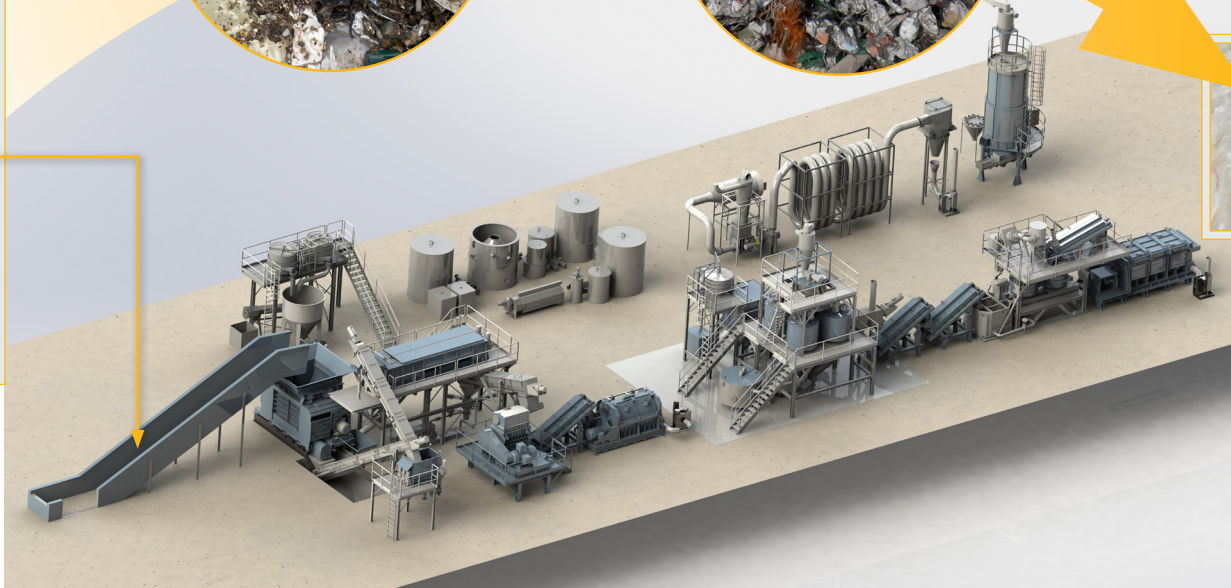

Technical data:	
Input capacity:	approx. 1,0 – 2,2 t/h
Installed power:	approx. 550 – 800 kW (approx. 70% consumption) approx. 300 kW for Hot-Wash Step (approx. 70% consumption)
Dimensions:	up to approx. 70 x 25 x 9,5 m
Water amount:	approx. 25 - 50 m³/h water in circulation approx. 1,5 m³/t*h fresh water consumption

Item-No.: 0071037310



Engineering, Manufacturing, Delivery:

HERBOLD Meckesheim GmbH

Industriestrasse 33 | D-74909 Meckesheim
 Fon.: +49 6226 932-0 | Fax: +49 6226 932 495
 herbold@herbold.com | www.herbold.com